

ATL-1250P

General Features

- Engine (PERKINS 4012-46TWG2A), Radiator 50°C max, belt driven fans, with safety guard
- 24V charge alternator
- Alternator (STAMFORD LVI 634G1), single bearing alternator IP23, insulation class H/H
- Skid and vibration isolators
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Permanent Magnet Generator (PMG)
- Standard control panel
- Four 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, industrial muffler

PHOTO FOR REFERENCE ONLY




Technical Data

Output Frequency	50 Hz
Rated Speed	1500RPM
Prime Power	1250KVA/1000KW
Standby Power	1375KVA/1100KW
Rated Voltage	400/230V
Phase	3
Power Factor	0.8
Fuel Consumption 100% Load	259L/Hr
Fuel Consumption 75% Load	196L/Hr
Fuel Consumption 50% Load	143L/Hr
Operation Altitude	≤1000m
Ambient Temperature	≤50°C



Dimension and Weight

Genset Type	Open Frame	Soundproof ISO 20ft GP
Length(L) (mm)	4800	6058
Width(W) (mm)	2000	2438
Height(H) (mm)	2700	2591
Gross Weight (kg)	9550	14550

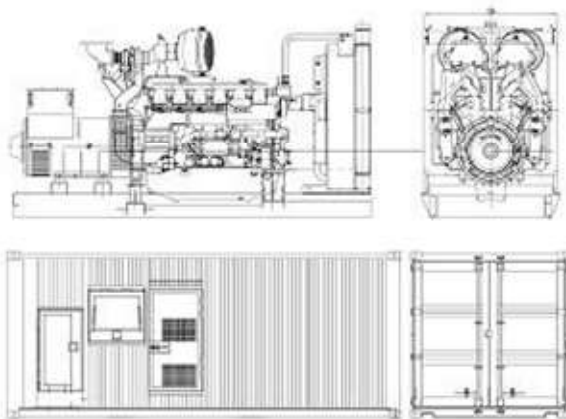



ATL-1250P

Engine Specification

Manufacturer / Model:	PERKINS 4012-46TWG2A, 4-cycle
Air Intake System:	Turbocharged, Air/Water Cooling
Fuel System:	Direct
Cylinder Arrangement:	12 in V
Displacement:	45.842L
Bore and Stroke:	160*190 (mm)
Compression Ratio:	13.6:1
Rated RPM:	1500rpm
Max. Standby Power at Rated RPM:	1224KW
Governor Type:	Electronic
Exhaust Gas Flow:	180m ³ /min
Exhaust Temperature:	422°C
Max Back Pressure:	5kPa
Max Intake Restriction:	4kPa
Combustion air flow:	109m ³ /min
Cooling fan air flow:	1320m ³ /min
Total Oil Capacity:	159L
Oil Consumption:	0.52g/KWh
Total Coolant Capacity:	225L
Thermostat:	71-85°C
Max Water Temperature:	101°C

Alternator Specification

Manufacturer / Model:	STAMFORD LVI 634G1
Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing:	1
Protection Grade:	IP23
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
Telephone Influence Factor (TIF):	< 50
THF:	< 2%
Voltage Regulation, Steady State:	≤ ± 1%
Alternator Capacity:	1250KVA
Alternator Efficiencies:	94.9%
Air Cooling Flow:	2.18m ³ /s

ATL-1250P

Control System

Standard Deepsea DSE6020 Auto Mains Failure Control Panel

- Manual or Auto Start Module for single genset applications. Designed to work with electronic and non-electronic engines, providing advanced engine monitoring and protection features.
- Includes a back-lit LCD display which shows the status of the engine at all times. Monitors engine speed, frequency, voltage and run hours and also displays the warning and shutdown status.
- Includes extensive outputs and inputs making this product ideal for a wide variety of applications. It can either be programmed using the front panel or by using DSEPC software.



Optional Deepsea DSE7320 Auto Mains Failure Control Panel

- Auto Mains (Utility) Failure Control Module suitable for a wide variety of single genset applications.
- Displays warnings, shutdown and engine status info on the back-lit LCD screen, illuminated LEDs, remote PC. Monitors the mains (utility) supply. Includes USB, RS232 and RS485 ports for system expansion.
- Compatible with electronic and non-electronic engines and offers flexible inputs, outputs and engine protections to meet extensive industry requirements.
- Includes enhanced event and performance monitoring, remote communication to reduce engine wear. It can either be programmed using the front panel or by using DSEPC software.



Optional Deepsea DSE8610 Auto Paralleling Control Panel

- Synchronizing Auto Start Control Module for multi-genset loadshare system, designed to synchronize up to 32 gensets including electronic and non-electronic engines.
- Monitors the genset and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.
- System alarms are annunciated on the LCD screen, illuminated LED and audible sounder.
- Records 250 events log for maintenance. Extensive monitoring, metering and protection features are included as well as comprehensive communication and system expansion options.
- Using DSE PC Software allows alteration of the operational sequences, timers, alarms with all communication ports active.





ATL-1250P

Options

Engine

- Water Jacket Preheater
- Water Separator
- Oil Pump
- Oil Preheater
- Battery Charger

Fuel System

- Daily Fuel Tank
- External Fuel Tank
- Auto Fuel Filling System
- Fuel Level Sensor

Control System

- Auto Remote Control Panel
- AMF Function Control Panel
- Auto Paralleling Control Panel
- Auto Transfer Switch (ATS)
- ABB breaker

Alternator

- Anti Condensation Heater
- Winding Temp Sensor

Available Voltages

- 440/254V
- 415/240V
- 380/220V

Reference Standards

Generator Set: ISO 8528, CE

Engine: ISO 3046, BS 5514, DIN 6271

Alternator: BS EN 60034, IEC34, BS5000, NEMA MG1-32, VDE 0530, CSA C22.2-100, AS1359

Warranty

. PT. Anugrah Teknik Listrindo memberikan garansi untuk genset selama 1 tahun atau 2000 jam mana yang dicapai terlebih dahulu.

Garansi tidak berlaku apabila :

- Uji coba baru dilakukan 3 bulan setelah barang diterima
- Uji coba tidak dilakukan oleh teknisi kami atau yang diberikuasa untuk melaksanakannya khususnya wilayah jabodetabek.
- Pembebanan melampaui batas kapasitas kemampuan.
- Akibat kesalahan pemeliharaan dan faktor alam (seperti tersambar petir, banjir, dsb).
- Garansi tidak berlaku untuk electronic, electrical parts dan instrument diluar mesin.

Kami juga memberikan pelayanan untuk jasa service maintainance sesuai dengan kebutuhan anda