

ATL-250P

General Features


- Engine (PERKINS 1506A-E88TAG3), Radiator 50°C max, belt driven fans, with safety guard
- 24V charge alternator
- Alternator (STAMFORD UCDI 274K1), single bearing alternator IP23, insulation class H/H
- Skid and vibration isolators
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, industrial muffler

PHOTO FOR REFERENCE ONLY



Technical Data

Output Frequency	50 Hz
Rated Speed	1500RPM
Prime Power	250KVA/200KW
Standby Power	275KVA/220KW
Rated Voltage	400/230V
Phase	3
Power Factor	0.8
Fuel Consumption 100% Load	199.4 G/KWH
Fuel Consumption 75% Load	194.3 G/KWH
Fuel Consumption 50% Load	207.9 G/KWH
Operation Altitude	≤1000m
Ambient Temperature	≤50°C

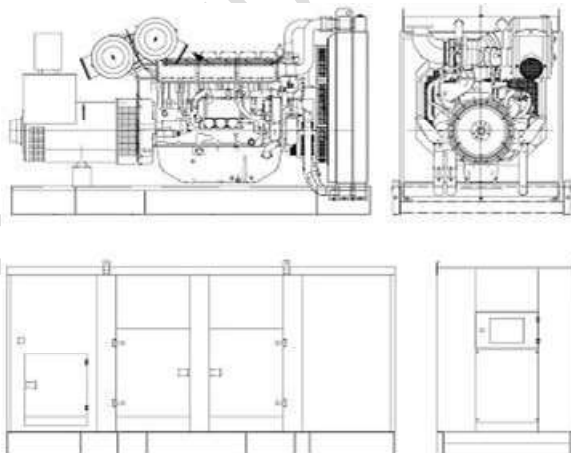

Dimension and Weight

Genset Type	Open Frame	Soundproof
Length(L) (mm)	2850	3700
Width(W) (mm)	1100	1260
Height(H) (mm)	1500	2150
Gross Weight (kg)	2050	2850



ATL250-P

Engine Specification

Manufacturer / Model:	PERKINS 1506A-E88TAG3, 4-cycle
Air Intake System:	Turbocharged, Air/Air Cooling
Fuel System:	Direct
Cylinder Arrangement:	6 in line
Displacement:	8.8L
Bore and Stroke:	112*149 (mm)
Compression Ratio:	16.1:1
Rated RPM:	1500rpm
Max. Standby Power at Rated RPM:	244KW
Governor Type:	Electronic
Exhaust Gas Flow:	235L/S
Exhaust Temperature:	537°C
Max Back Pressure:	10kPa
Max Intake Restriction:	3.7kPa
Combustion air flow:	15m ³ /min
Cooling fan air flow:	370m ³ /min
Total Oil Capacity:	29.6L
Oil Consumption:	0.1% fuel consumption
Total Coolant Capacity:	41L
Thermostat:	87-98°C
Max Water Temperature:	107°C

Alternator Specification

Manufacturer / Model:	STAMFORD UCDI 274K1
Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing:	1
Protection Grade:	IP23
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
Telephone Influence Factor (TIF):	< 50
THF:	< 2%
Voltage Regulation, Steady State:	≤ ± 1%
Alternator Capacity:	250KVA
Alternator Efficiencies:	92.7%
Air Cooling Flow:	0.58m ³ /s

ATL-250P

Control System

Standard MPD-3110 Auto Control Panel

- Manual or Auto Start Module for single genset applications. Designed to work with electronic and non-electronic engines, providing advanced engine monitoring and protection features.
- Includes a back-lit icon LCD display which shows the status of the engine at all times. Monitors engine speed, frequency, voltage and run hours and also displays the warning and shutdown status.
- Includes extensive outputs and inputs making this product ideal for a wide variety of applications. It can either be programmed using the front panel or by using DSE PC software.



Optional MPD-7320 Auto Mains Failure Control Panel

- Auto Mains (Utility) Failure Control Module suitable for a wide variety of single genset applications.
- Displays warnings, shutdown and engine status info on the back-lit LCD screen, illuminated LEDs, remote PC. Monitors the mains (utility) supply. Includes USB, RS232 and RS485 ports for system expansion.
- Compatible with electronic and non-electronic engines and offer flexible inputs, outputs and engine protections to meet extensive industry requirements.
- Includes enhanced event and performance monitoring, remote communications to reduce engine wear. It can either be programmed using the front panel or by using DSE PC software.



Optional MPD-8610 Auto Paralleling Control Panel

- Synchronizing Auto Start Control Module for multi-genset load share system, designed to synchronize up to 32 gensets including electronic and non-electronic engines.
- Monitors the genset and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.
- System alarms are annunciated on the LCD screen, illuminated LED and audible sounder.
- Records 250 events log for maintenance. Extensive monitoring, metering and protection features are included as well as comprehensive communication and system expansion options.
- Using DSE PC Software allows alteration of the operational sequences, timers, alarms with all communication ports active.





ATL-250P

Options

Engine

- Water Jacket Preheater
- Water Separator
- Oil Pump
- Oil Preheater
- Battery Charger

Fuel System

- Daily Fuel Tank
- External Fuel Tank
- Auto Fuel Filling System
- Fuel Level Sensor

Control System

- Auto Remote Control Panel
- AMF Function Control Panel
- Auto Paralleling Control Panel
- Auto Transfer Switch (ATS)
- ABB breaker

Alternator

- Anti Condensation Heater
- Permanent Magnet Generator
- Winding Temp Sensor

Enclosure

- Rainproof Type
- Soundproof Rental Type
- Mobile Type

Available Voltages

- 440/254V
- 415/240V
- 380/220V

Reference Standards

Generator Set: ISO 8528, CE

Engine: ISO 3046, BS 5514, DIN 6271

Alternator: BS EN 60034, IEC34, BS5000, NEMA MG1-32, VDE 0530, CSA C22.2-100, AS1359

Warranty

. PT. Anugrah Teknik Listrindo memberikan garansi untuk genset selama 1 tahun atau 2000 jam mana yang dicapai terlebih dahulu.

Garansi tidak berlaku apabila :

- Uji coba baru dilakukan 3 bulan setelah barang diterima
- Uji coba tidak dilakukan oleh teknisi kami atau yang diberikuasa untuk melaksanakannya khususnya wilayah jabodetabek.
- Pembebanan melampaui batas kapasitas kemampuan.
- Akibat kesalahan pemeliharaan dan faktor alam (seperti tersambar petir, banjir, dsb).
- Garansi tidak berlaku untuk electronic, electrical parts dan instrument diluar mesin.

Kami juga memberikan pelayanan untuk jasa service maintenance sesuai dengan kebutuhan anda