

## ATL-600P

### General Features


- Engine (PERKINS 2806C-E18TAG1A), Radiator 50°C max, belt driven fans, with safety guard
- 24V charge alternator
- Alternator (STAMFORD HCI 544E1), single bearing alternator IP23, insulation class H/H
- Skid and vibration isolators
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, industrial muffler

PHOTO FOR REFERENCE ONLY



### Technical Data

Output Frequency	50 Hz
Rated Speed	1500RPM
Prime Power	600KVA/480KW
Standby Power	660KVA/528KW
Rated Voltage	400/230V
Phase	3
Power Factor	0.8
Fuel Consumption 100% Load	129.0L/Hr
Fuel Consumption 75% Load	95.5L/Hr
Fuel Consumption 50% Load	63.0L/Hr
Operation Altitude	≤1000m
Ambient Temperature	≤50°C

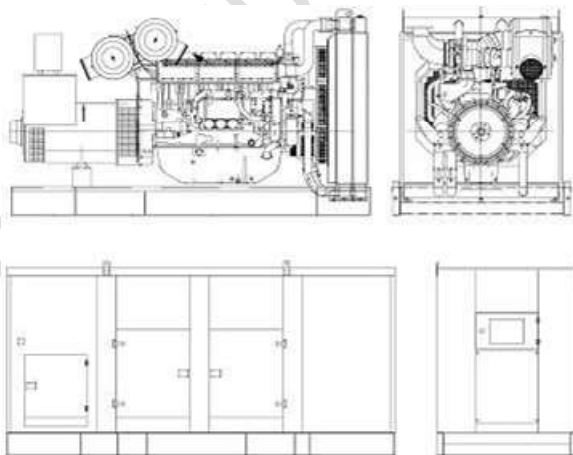

### Dimension and Weight

Genset Type	Open Frame	Soundproof
Length(L) (mm)	3500	5150
Width(W) (mm)	1630	2060
Height(H) (mm)	2130	2600
Gross Weight (kg)	4550	6550



## ATL-600P

### Engine Specification

Manufacturer / Model:	PERKINS 2806C-E18TAG1A, 4-cycle
Air Intake System:	Turbocharged, Air/Air Cooling
Fuel System:	MEUI
Cylinder Arrangement:	6 in line
Displacement:	18.13L
Bore and Stroke:	145*183 (mm)
Compression Ratio:	14.5:1
Rated RPM:	1500rpm
Max. Standby Power at Rated RPM:	598KW
Governor Type:	Electronic
Exhaust Gas Flow:	115m <sup>3</sup> /min
Exhaust Temperature:	565°C
Max Back Pressure:	6.9kPa
Max Intake Restriction:	6.35kPa
Combustion air flow:	41m <sup>3</sup> /min
Cooling fan air flow:	702m <sup>3</sup> /min
Total Oil Capacity:	62L
Oil Consumption:	0.1%fuel consumption
Total Coolant Capacity:	61L
Thermostat:	88-98°C
Max Water Temperature:	103°C

### Alternator Specification

Manufacturer / Model:	STAMFORD HCI 544E1
Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing:	1
Protection Grade:	IP23
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
Telephone Influence Factor (TIF):	<50
THF:	<2%
Voltage Regulation, Steady State:	≤ ± 1%
Alternator Capacity:	610KVA
Alternator Efficiencies:	94.9%
Air Cooling Flow:	1.035m <sup>3</sup> /s

## ATL-600P

### Control System

#### Standard Deepsea DSE6020 Auto Mains Failure Control Panel

- Manual or Auto Start Module for single genset applications. Designed to work with electronic and non-electronic engines, providing advanced engine monitoring and protection features.
- Includes a back-lit LCD display which shows the status of the engine at all times. Monitors engine speed, frequency, voltage and run hours and also displays the warning and shutdown status.
- Includes extensive outputs and inputs making this product ideal for a wide variety of applications. It can either be programmed using the front panel or by using DSEPC software.



#### Optional Deepsea DSE7320 Auto Mains Failure Control Panel

- Auto Mains (Utility) Failure Control Module suitable for a wide variety of single genset applications.
- Displays warnings, shutdown and engine status info on the back-lit LCD screen, illuminated LEDs, remote PC. Monitors the mains (utility) supply. Includes USB, RS232 and RS485 ports for system expansion.
- Compatible with electronic and non-electronic engines and offers flexible inputs, outputs and engine protections to meet extensive industry requirements.
- Includes enhanced event and performance monitoring, remote communication to reduce engine wear. It can either be programmed using the front panel or by using DSEPC software.



#### Optional Deepsea DSE8610 Auto Paralleling Control Panel

- Synchronizing Auto Start Control Module for multi-genset loadshare system, designed to synchronize up to 32 gensets including electronic and non-electronic engines.
- Monitors the genset and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.
- System alarms are annunciated on the LCD screen, illuminated LED and audible sounder.
- Records 250 events log for maintenance. Extensive monitoring, metering and protection features are included as well as comprehensive communication and system expansion options.
- Using DSE PC Software allows alteration of the operational sequences, timers, alarms with all communication ports active.



## ATL-600P

### Options

#### Engine

- Water Jacket Preheater
- Water Separator
- Oil Pump
- Oil Preheater
- Battery Charger

#### Fuel System

- Daily Fuel Tank
- External Fuel Tank
- Auto Fuel Filling System
- Fuel Level Sensor

#### Control System

- Auto Remote Control Panel
- AMF Function Control Panel
- Auto Paralleling Control Panel
- Auto Transfer Switch (ATS)
- ABB breaker

#### Alternator

- Anti Condensation Heater
- Permanent Magnet Generator
- Winding Temp Sensor

#### Enclosure

- Soundproof Rental Type
- Mobile Type

#### Available Voltages

- 440/254V
- 415/240V
- 380/220V

### Reference Standards

**Generator Set:** ISO 8528, CE

**Engine:** ISO 3046, BS 5514, DIN 6271

**Alternator:** BS EN 60034, IEC34, BS5000, NEMA MG1-32, VDE 0530, CSA C22.2-100, AS1359

### Warranty

. PT. Anugrah Teknik Listrindo memberikan garansi untuk genset selama 1 tahun atau 2000 jam mana yang dicapai terlebih dahulu.

Garansi tidak berlaku apabila :

- Uji coba baru dilakukan 3 bulan setelah barang diterima
- Uji coba tidak dilakukan oleh teknisi kami atau yang diberikuasa untuk melaksanakannya khususnya wilayah jabodetabek.
- Pembebanan melampaui batas kapasitas kemampuan.
- Akibat kesalahan pemeliharaan dan faktor alam (seperti tersambar petir, banjir, dsb).
- Garansi tidak berlaku untuk electronic, electrical parts dan instrument diluar mesin.

Kami juga memberikan pelayanan untuk jasa service maintenance sesuai dengan kebutuhan anda